


In-Line Fixture Kit

Equip **ILFS-TR5001 SII-POGO-36**
In-Line Fixture

TRI - TR5001 SERIES II - POGO

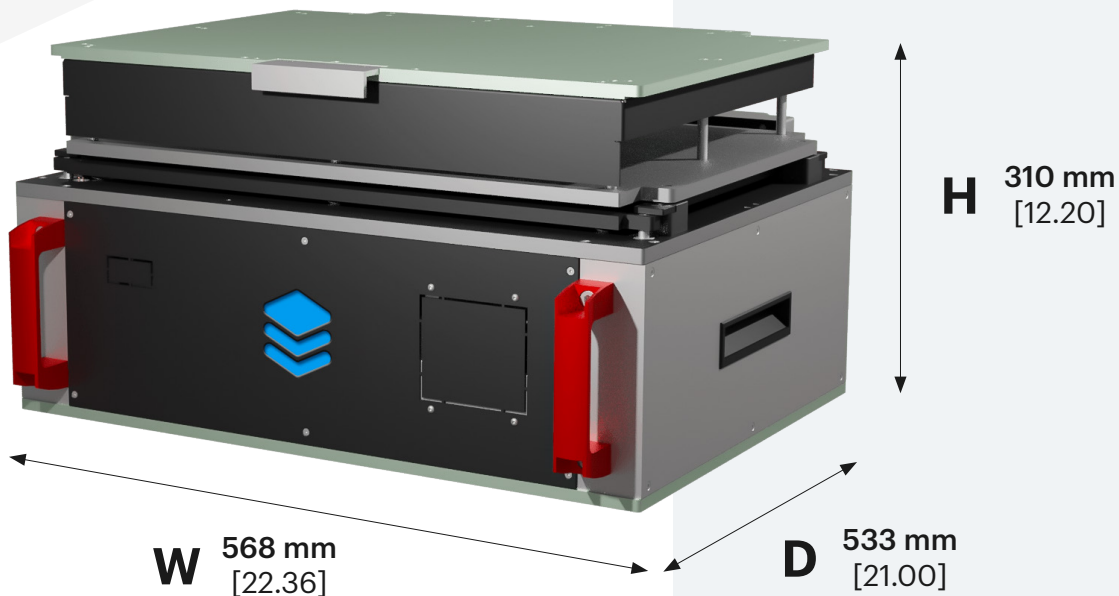

Technical Features

- › External Dimension (width x depth x height) with Handles:
568 mm x 533 mm x 310 mm
[22.36 in x 21.00 in x 12.20 in]
- › DUT size:
70 x 70 [mm] to maximum 500 x 360 [mm]
2.75 x 2.75 [in] to maximum 19.68 x 14.13 [in]
In case of Top test the max. DUT size to be clarified.
- › Top and Bottom test
- › Installation height of test probes:
bottom - 16 mm, top - 16 mm
- › Maximum 4096 channels

